


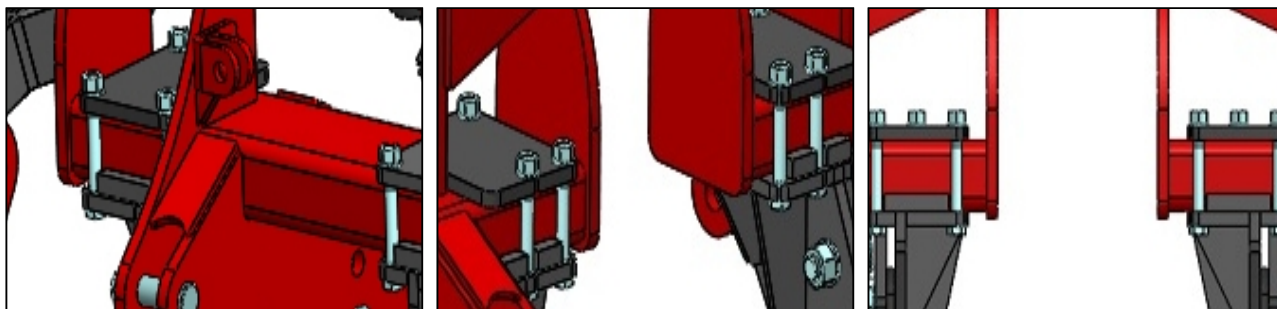

-carried rigid frame

-6pcs of the curved tines secured by the cutting pegs

-three-point linkage with arms

Technical parameters:

Model	HKK 300/6
Max. working depth	45 cm
Nb. of the tines	6 pc
Weight	980 kg
Working width	300 cm
Min. power output	150 kW

Price: 0.00CZK

Contact details:

Contact person: Vladimír Cingroš

Phone: 606 036 705

Email: vlcingros@smscz.cz